


Specification:

1. JK801: uniformed key for all switches
2. JK802: unique key for each switch
3. 2 keys for each switch

Technical Requirement:

1. Can be pulled out easily at OFF position
Pulling force ≤ 2 kgf (19.6 N)
2. Can be turned freely between OFF and ON positions
Turning force ≤ 4.5 kgf (44 N)
3. Electric load capacity:
 - a) Pin 1 (BAT): 4.0 amperes max.
 - b) Pin 2: 2.5 amperes max.
 - c) Pin 3: 1.5 amperes max.
 - d) Total power rate: ≤ 180 watts
4. No flaw at surface
5. Life span: ≥ 50,000 times @ full load
6. Compliance with standard QC/T504-1999

Working Principle:

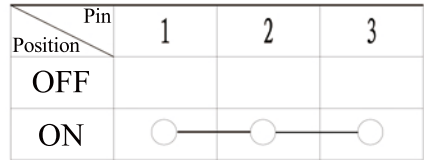

| | | | | | | | | | |
|----|----|-------|----|----|------|----|-----|---|--|
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| 标记 | 处数 | 更改文件名 | 签字 | 日期 | 图样标记 | 重量 | 比例 | | |
| 设计 | | | | | | | 1:1 | | |
| | | | | | | | | | |
| | | | 日期 | | 共 | 张 | 第 | 张 | |

<https://www.nocoev.com/>

Key Operated Switch

JK801 / JK802