
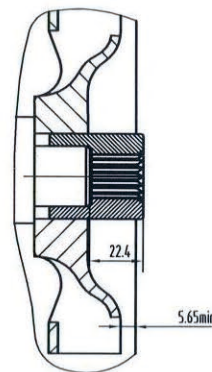


K Direction

4.5:1



Flat Root Involute Internal Splines

Name	Code	Description
Gear Root Form		Circle
Gear Mating Type		Side Mating
Diametral Pitch	P	24/48
Teeth	Z	19
Pressure Angle	α	45°
Pitch Circle Diameter	D	$\phi 20.108418$
Base Circle Diameter	Db	$\phi 14.218666$
Max. Diameter	Dei	$\phi 21.59-\phi 21.8186$
Min. Diameter	Dii	$\phi 19.485-\phi 19.518$
Form Diameter		$\phi 21.2852$
Tolerance Grade & Mating Type		5H
Spacewidth	Max	1.94056
	Min	1.87452
Needle measurement		$\phi 17.05356$
Needle Diameter		2.032
Spline Hardness		25 Rc Min

Characteristics

1. power rate: 5.3 kW
2. rated voltage: 48V
3. speed: 3000 rpm
4. exciting: separate
5. duty: 60 min
6. insulation: class H

* EQS: equally spaced

										www.noco-evco.com	
										NOCO SHOP	
标记	数量	更改文件号	签名	年月日	阶段标记		重量	SCALE		OCZ.300.576	
设计					S			1:1.5		XQ-5.3	
校对					共张		第张	0			
审核											
工艺											